


LED Linear Lighting Series - LS25




Dimensions: W=25mm, H=9mm,
L=300, 500, 800, 1000mm

READ BEFORE ASSEMBLY

- Indoor use only. IP20.
- Voltage: 12VDC / 24VDC / 9.5-30VDC.
- Operating Temperature: -20° C to 45° C.
- Do not install arbitrary touch(T) and touch dimmable(TD) function light on the surface of metal.
- When connected in series, the total length should be no longer than 2M; most suitable length is 1.5M.
- When connected in parallel (using junction box), there is no limited length based on sufficient driver.
- To connect the side having black IC to driver.



Installation Instruction

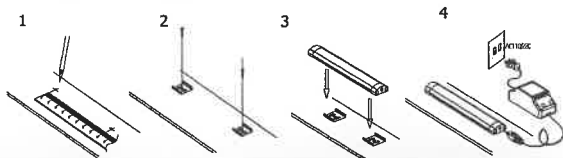


Single Point Touch(P) & Touch Dimmable Function(PD)




Arbitrary Touch(T) and Touch Dimmable Function(TD)

Complete set connection guide:




1PCS+Driver



n PCS+Driver

Accessories Usage Instruction:



Optional Voltage:

1. 12VDC lights use 12VDC constant voltage power supply.
2. 24VDC lights use 24VDC constant voltage power supply.
3. 9.5-30VDC lights can connect with car battery.