




**AUTOCLEAT**

THE ULTIMATE MOORING CLEAT

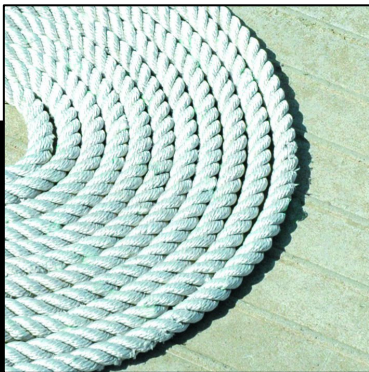

**STRONG**

QUALITY MARINE PRODUCTS. DESIGN & MANUFACTURE.

### **PUSH BUTTON MOORING LINE RELEASE**

Imagine being able to release your boat's mooring lines at the press of a button. No more turning your guests into crew, complete control at the push of a button. The AutoCleat will release any line configuration - loop, figure 8 or slip knot.

### **CLEAR DECKS AND PASSAGEWAYS**

Smart boat design means clever utilisation of every space and surface available. The AutoCleat provides a strong, secure mooring point while berthed and when not required, retracts flush at the push of a button leaving those valuable surfaces uncluttered. No more stubbed toes and no more snagged fishing lines or halyards.

### **DESIGNED AND BUILT TO LAST**

Cast from a high strength, corrosion resistant stainless steel, the horns of the AutoCleat give exceptional high side-load carrying capacity. With the remaining components manufactured from marine grade materials and composites, the AutoCleat comes complete with a 2 year warranty against manufacturing defects.



**STRONG**

QUALITY MARINE PRODUCTS. DESIGN & MANUFACTURE.



Designed and Manufactured by:  
**STRONG MARINE LIMITED**

T +64 9 522 1721 . F +64 9 522 1723 . E [sales@strongmarine.com](mailto:sales@strongmarine.com)  
PO Box 128-176 . Remuera . Auckland 1541 . New Zealand

### **THE ULTIMATE CLEAT**

The AutoCleat is the only mooring cleat that allows you to release your mooring lines, regardless of how the line is secured to the cleat and also retracts flush into the deck. International patent pending.

### **SIMPLE AND STRONG INSTALLATION**

The AutoCleat has been designed with for simple and quick installation. In less than 20 minutes using some basic tools, the AutoCleat can be installed and fully operational. Only two low amperage wires are required to power up the AutoCleat. The AutoCleat gains strength from being fixed through the deck of the boat.


### **THE LITTLE EXTRAS**

Due to the unique design of the crossing 'horns' the AutoCleat secures the mooring line above the deck not on the deck and thus reducing line wear on the boat. The AutoCleat comes standard with a Power Failure Over-ride (PFO) button located in the deck plate. The PFO allows the unit to be operated in the event of boat electrical power failure, always providing a secure mooring location.



UK BOATING  
BUSINESS EXHIBITION  
**2008**  
INNOVATION  
AWARD

## AUTOCLEAT SIZING

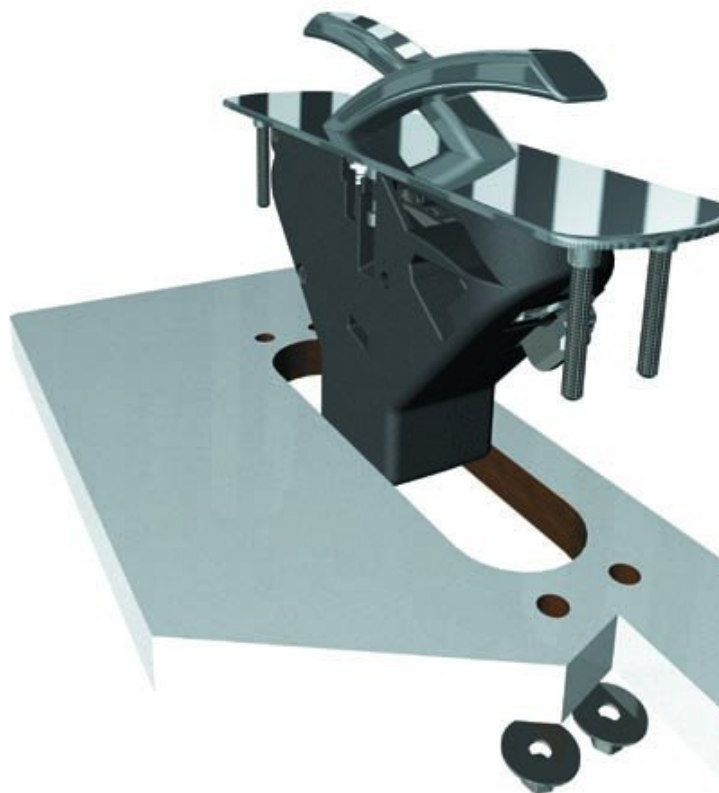

**Horn Distance**

200mm (8")

250mm (10")

300mm (12")

**Overall Length**

260mm (10.25")

300mm (11.8")

360mm (14.2")

**Side Load Capacity**

3000kg (6600lb)

7500kg (16500lb)

11000kg (24200lb)

**Load Release Limit**

30kg (66lb)

75kg (165lb)

100kg (220lb)

**Under Deck Clearance**

170mm (6.7")

225mm (8.9")

270mm (10.6")

**Water-Sealed to**

IP66

IP66

IP66

### TOOLS REQUIRED

Power Drill

Hole Saw - 50.4mm (2")

10mm Drill Bit

Jigsaw

Adjustable Wrench

**SPECIFICATIONS**