



Refer to the installation manual for installation instructions!
 According to ABYC recommendations all hose connections
 must be fitted with two hose clamps
 Maximum torque hose clamps: 6.0Nm / 54 InLbs

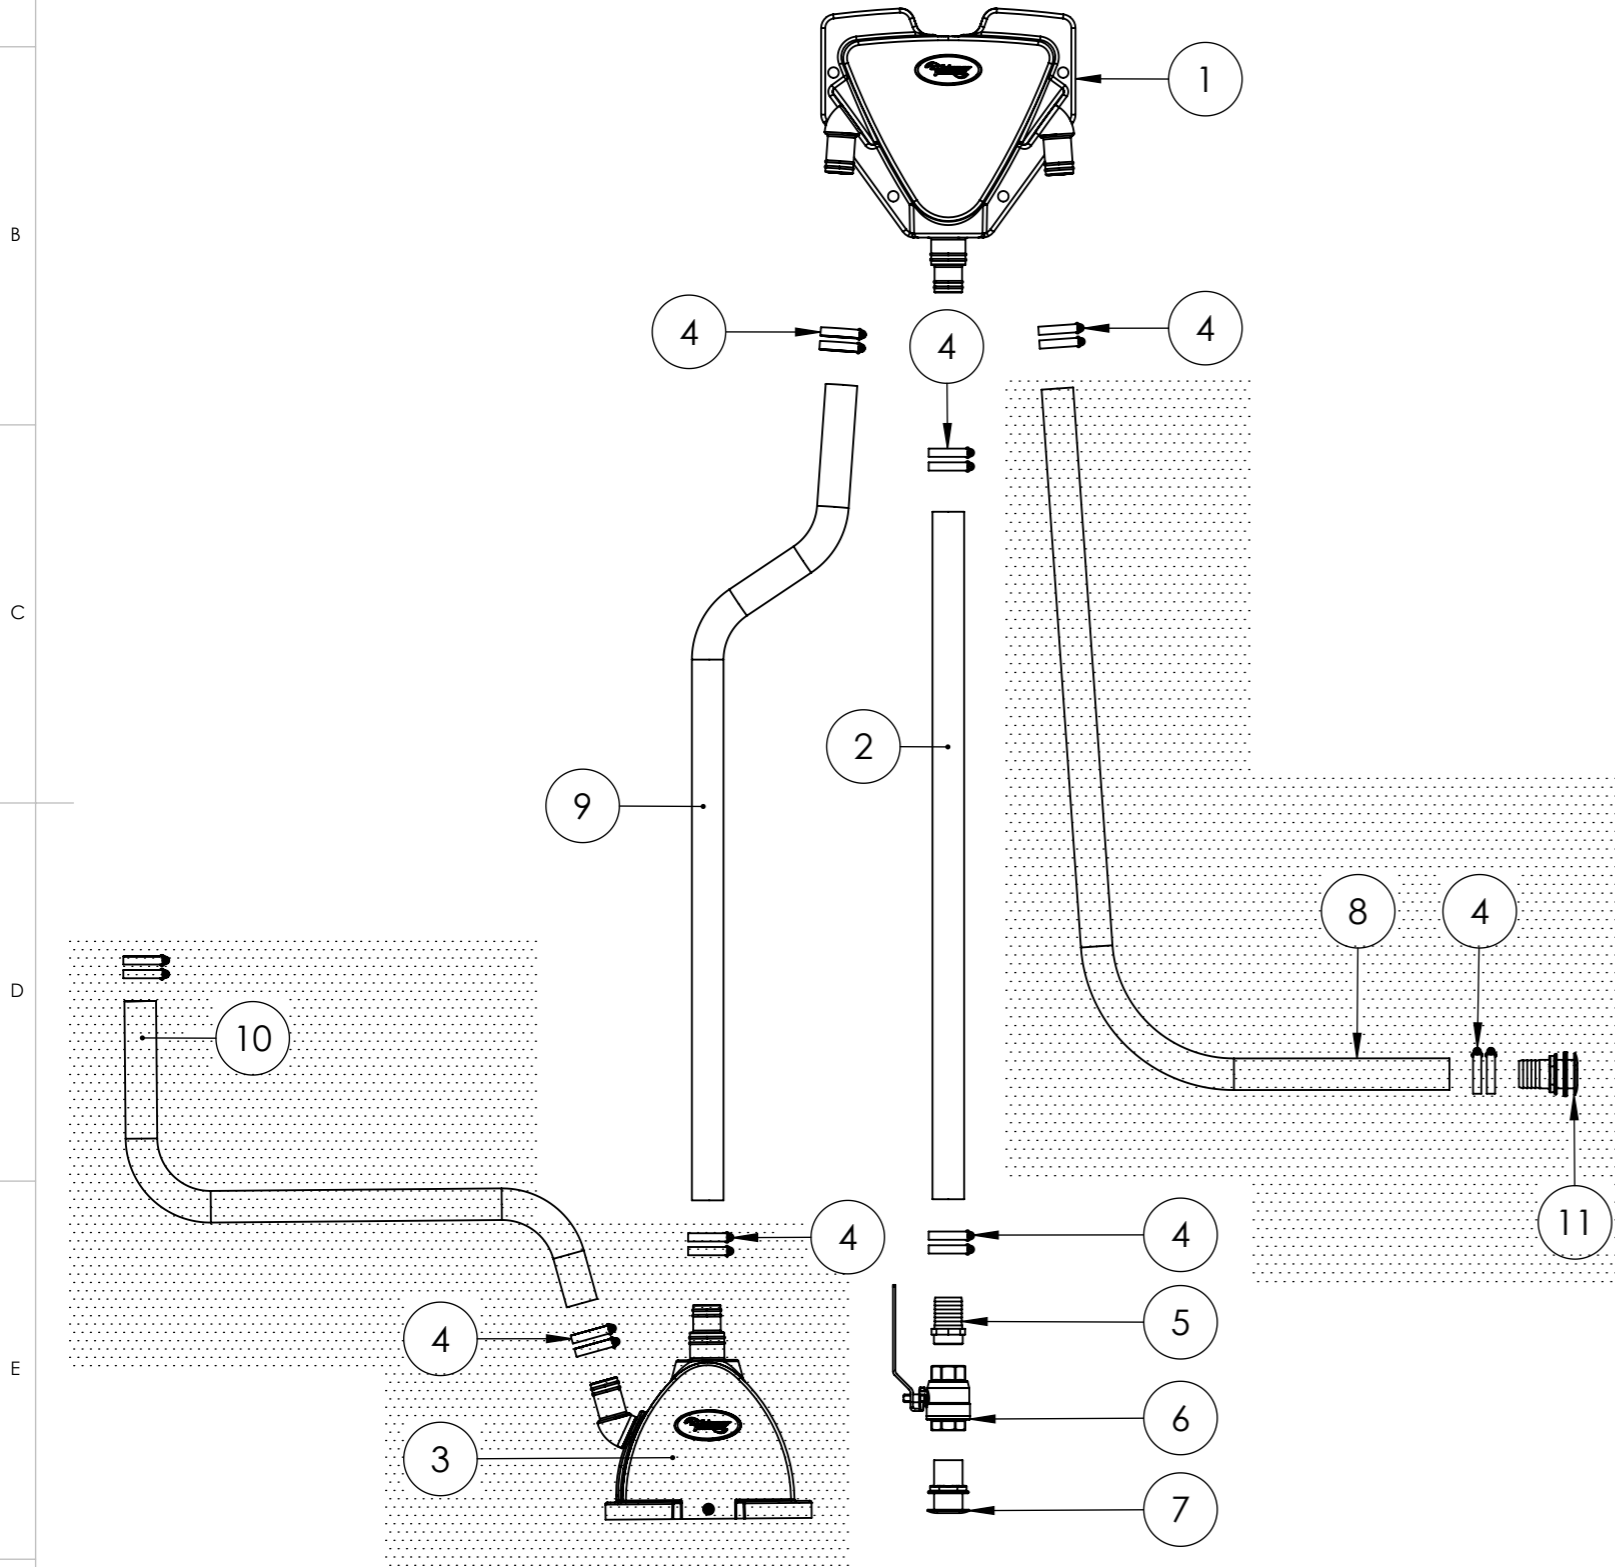

11	1	Brass through hull fitting hose connection 1 1/4 x 40	1013A173930	50230038
10	1	Marine exhaust hose 40 mm (1 5-8 inch)	1013P173928	50220033
9	1	Marine exhaust hose 40 mm (1 5-8 inch)	1013P173927	50220033
8	1	Marine exhaust hose 40 mm (1 5-8 inch)	1013P173926	50220033
7	1	Brass through hull fitting 1 1/4 x 70	1013A173923	50230033
6	1	Lever operated ball valve FF 1 1/4	50230044	50230044
5	1	Slangtule Buitendraad 1 1/4"x 40	50221015	50221015
4	16	Slangklem RVS 32 - 50	50221504 Slangklem RVS 32-50	50221504
3	1	WP-WL 40-40 Waterlock	1013A173899	40230083
2	1	Marine exhaust hose 40 mm (1 5-8 inch)	1013P173921	50220033
1	1	Water Gas Separator Assy 40/40/40	1013A173898	40230087
ITEM NO.	QTY.	DESCRIPTION	DRAWING	ARTICLE No.

UNLESS OTHERWISE SPECIFIED: CHAMFER SHARP EDGES GENERAL TOLERANCE NEN ISO 2768-m FORM AND PLACE TOLERANCES NEN-ISO 1101 WELDING SYMBOL NEN EN 22553 ROUGHNESS ACC. to NEN3634		TOLERANCE PRINCIPLE ISO 8015	FINISH: -	DO NOT SCALE DRAWING	
PROJECTION : THIRD ANGLE UNITS : mm		Material:	SHEET FORMAT: A3	TITLE: WP-WGS 40 mm	
DRAWN: M.B. 24-5-2017 CHK'D: M.F. 13-6-2017 PRINTED: 22-6-2017		STATUS: Released	DRAWING: 1013A173920	ARTICLE NO. 40330291	REVISION
Weight: 8755,63 gram		SCALE:1:11	SHEET 2 OF 2		

		Article no
Contents of the delivery	Pos 1 (1x), 4 (8x), 9 & 2 (2.5m), 5 (1x), 6 (1x), 7 (1x)	40230291 (Total Delta/gas separator kit 40 mm)
Optional installation materials	Pos 4 (8x), 10 & 8 (Total 3m), 3 (1x), 11 (1x)	40230281 (Waterlock kit 40 mm)